



KÖMMERLING 76
centre seal system AluClip Zero

KÖMMERLING 76 AluClip Zero.

DESIGN VARIANTS.

■ **Wood and aluminium window look**

■ **The glass pane lies on the same level in sash windows as in fixed glazing.**


■ **Glazing 36–50 mm thick.**



■ **Flush mounted look**

■ **Virtually flush-mounted glass pane**


■ **Glazing 48–56 mm thick.**

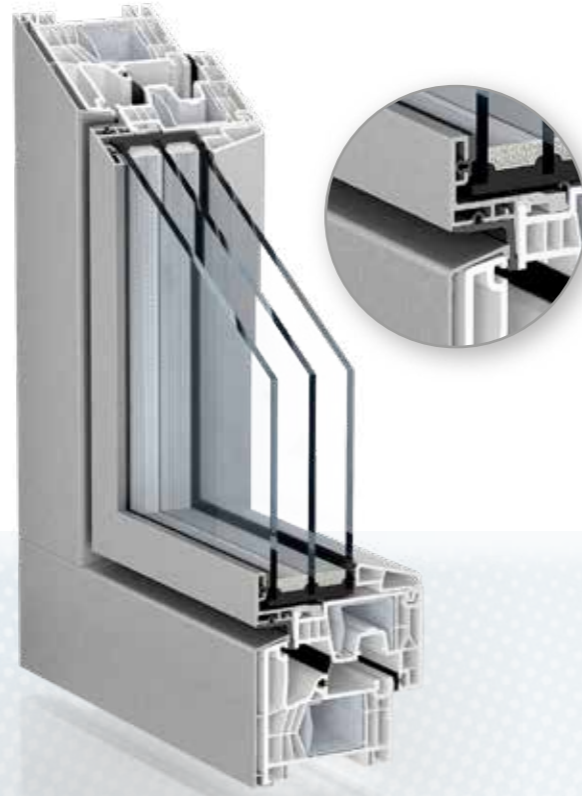

■ **All-glass look, sash invisible from the outside**

■ **Virtually identical sash and glass level**

■ **Glazing 36–50 mm thick.**

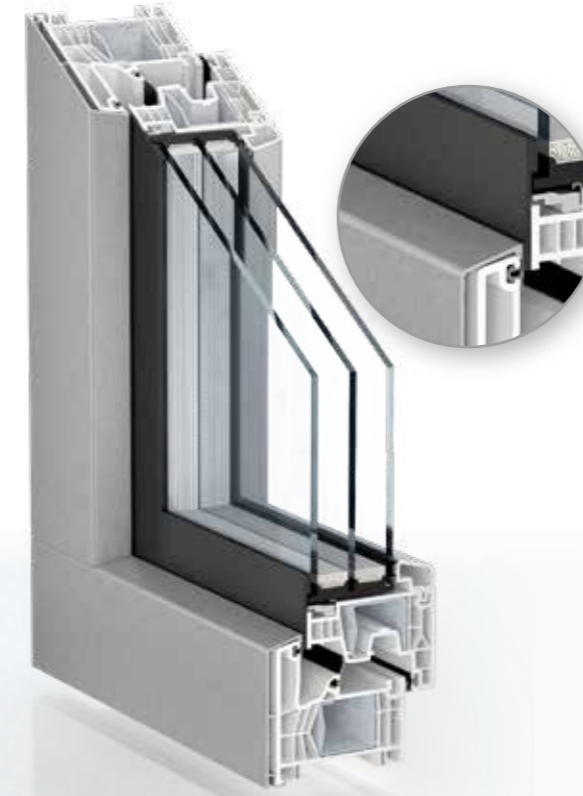

■ Three design covers.

■ Patent application submitted.

■ Glazing 36–50 mm and 48–56 mm thick.

■ U_f value 1.1–1.2 W/(m²K)

■ Recyclable.

AluClip Zero – the design variant for the KÖMMERLING 76 system is available in three versions. Unique on the market, with flush-mounted look and virtually flush-mounted glass pane, an all-glass look, and a classical wood and aluminium look. On this version, the glass pane in the sash lies on the same level as fixed glazing.

Compatibility enjoys high priority for this product as well: The important components from the KÖMMERLING 76 system can be used. AluClip Zero expands greatly the 76 mm system range specifically for demanding architectural projects and can bring its advantages to bear exactly where the aluminium look is just as important as the functional benefits of PVC-U.



The residential door variant is flush-mounted and its technical highlights include a “floating” fastener for the panelling. This counteracts bending under thermal load.

■ Residential door with flush-mounted, inter-sash prefabricated panelling.

■ Residential door prefabricated panelling 36–86 mm thick.

■ U_D values in passive house range.



profine GmbH
KÖMMERLING KUNSTSTOFFE

P.O. Box 2165 · 66929 Pirmasens · Germany
Phone +49 6331 56-0 · Fax +49 6331 56-2475
Email: info@koemmerling.de
Internet: www.koemmerling.de